

VineWeave Canopy | General Arrangement

green building · Group 12 · Schematic design drawing · Dimensions in metres unless noted


PLAN | Centre-line representation

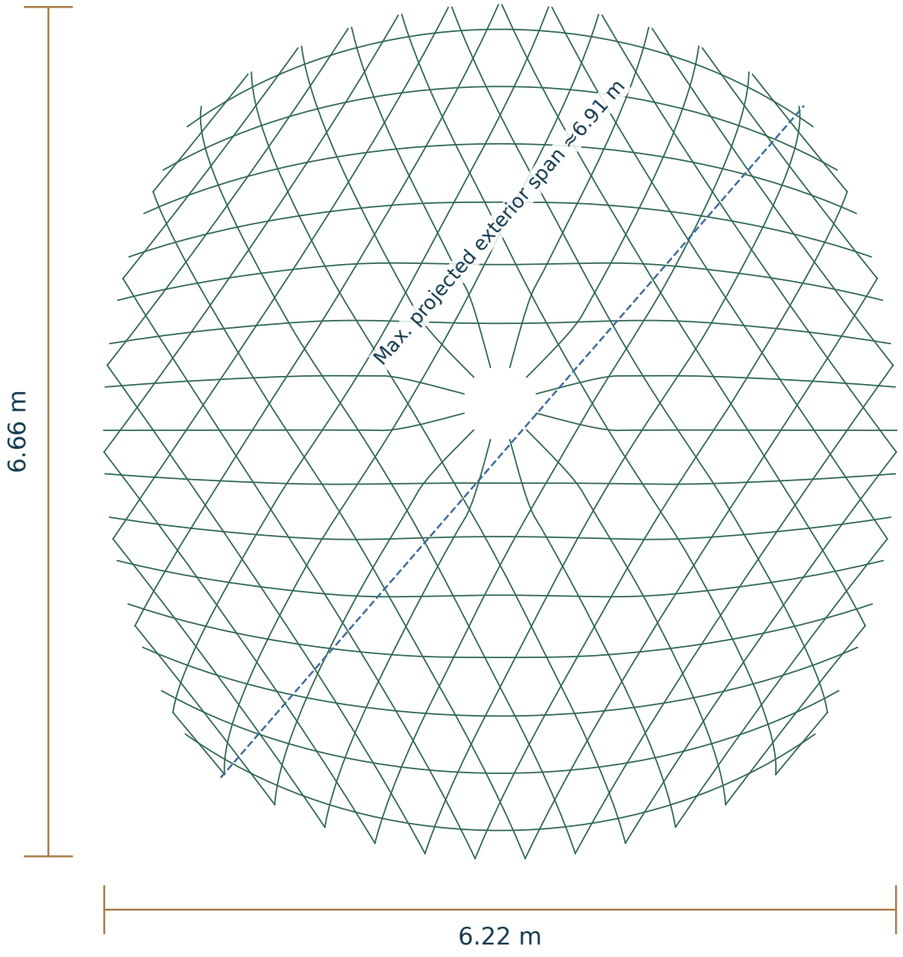

ELEVATION | Projected X–Z view

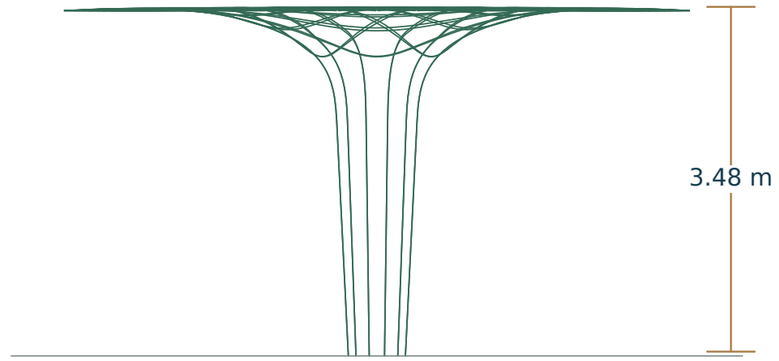

INCLINATION DEFINITION

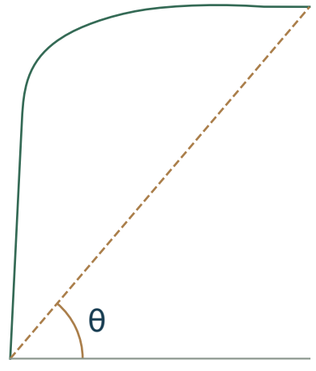

12 support endpoint chords:
θ = 45.9°–50.7° above horizontal.
The curved member does not
have a single local inclination.


59 members · exterior diameter 80 mm
Selected crown controls: corner 0.85, expansion 1.08

Source: supplied model centre lines and exterior mesh; dimensions rounded. Max span uses XY exterior-mesh distances; angles use 3D endpoint chords.
This is a general-arrangement drawing, not a fabrication, foundation, structural-safety or accessibility certification.

VineWeave Canopy | Member Schedule & Interfaces

Proposed build-up · Interface schematic, not an engineered node detail

Zone	Qty	Proposed specification	Quantity / condition
Crown	47	Engineered bamboo, solid Ø80 mm	219.28 m
Supports	12	Q355B tube, Ø80×4 mm, galvanised	69.38 m
Head nodes	12	Plate + sleeve + adhesive + bolts	Verify rotational stiffness
Base	1 set	Flange/anchorage + precast weight	Foundation checks required
Planting	2 + 1	Boston ivy + Rangoon creeper	Local suitability pending

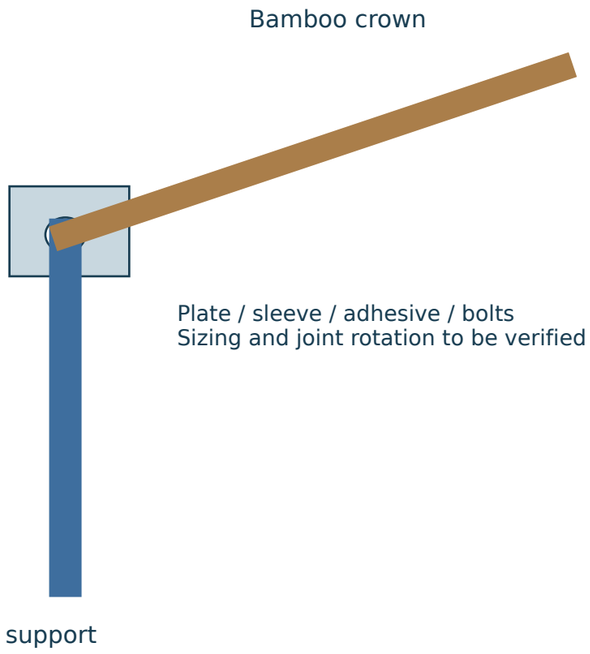

ASSEMBLY LOGIC

Prefabricate & number → Position base → Align members → Assemble, grout & cure → Inspect, plant & restore

14 person-days is a preliminary labour allowance, not 14 calendar days.
Long members and the ≈9.07 t reference counterweight constrain transport/lifting; wet joints limit lossless reversal.

Source: Cost-Analysis.xlsx and project build-up. Product data, attachment, loads, global stability, joint restraint and foundation/anchorage remain unverified.
No engineering authority or supplier quotation is implied by this schematic.